


SAP ABAP table CRMC_BRF_CONIN {BRF Expression for Controlled Input Fields (Header Data)}

CRMC_BRF_CONIN	
<u>CLIENT</u>	[CLNT (3)]
<u>IMPORT_STATUS</u>	[CHAR (1)]
<u>BRF_APPLCLASS</u>	[CHAR (30)]
<u>BRF_ACTION</u>	[CHAR (20)]
<u>VERSION</u>	[NUMC (4)]
<u>CONIN_GUID</u>	[CHAR (32)]
<u>SRC_STRATEGY</u>	[CHAR (10)]

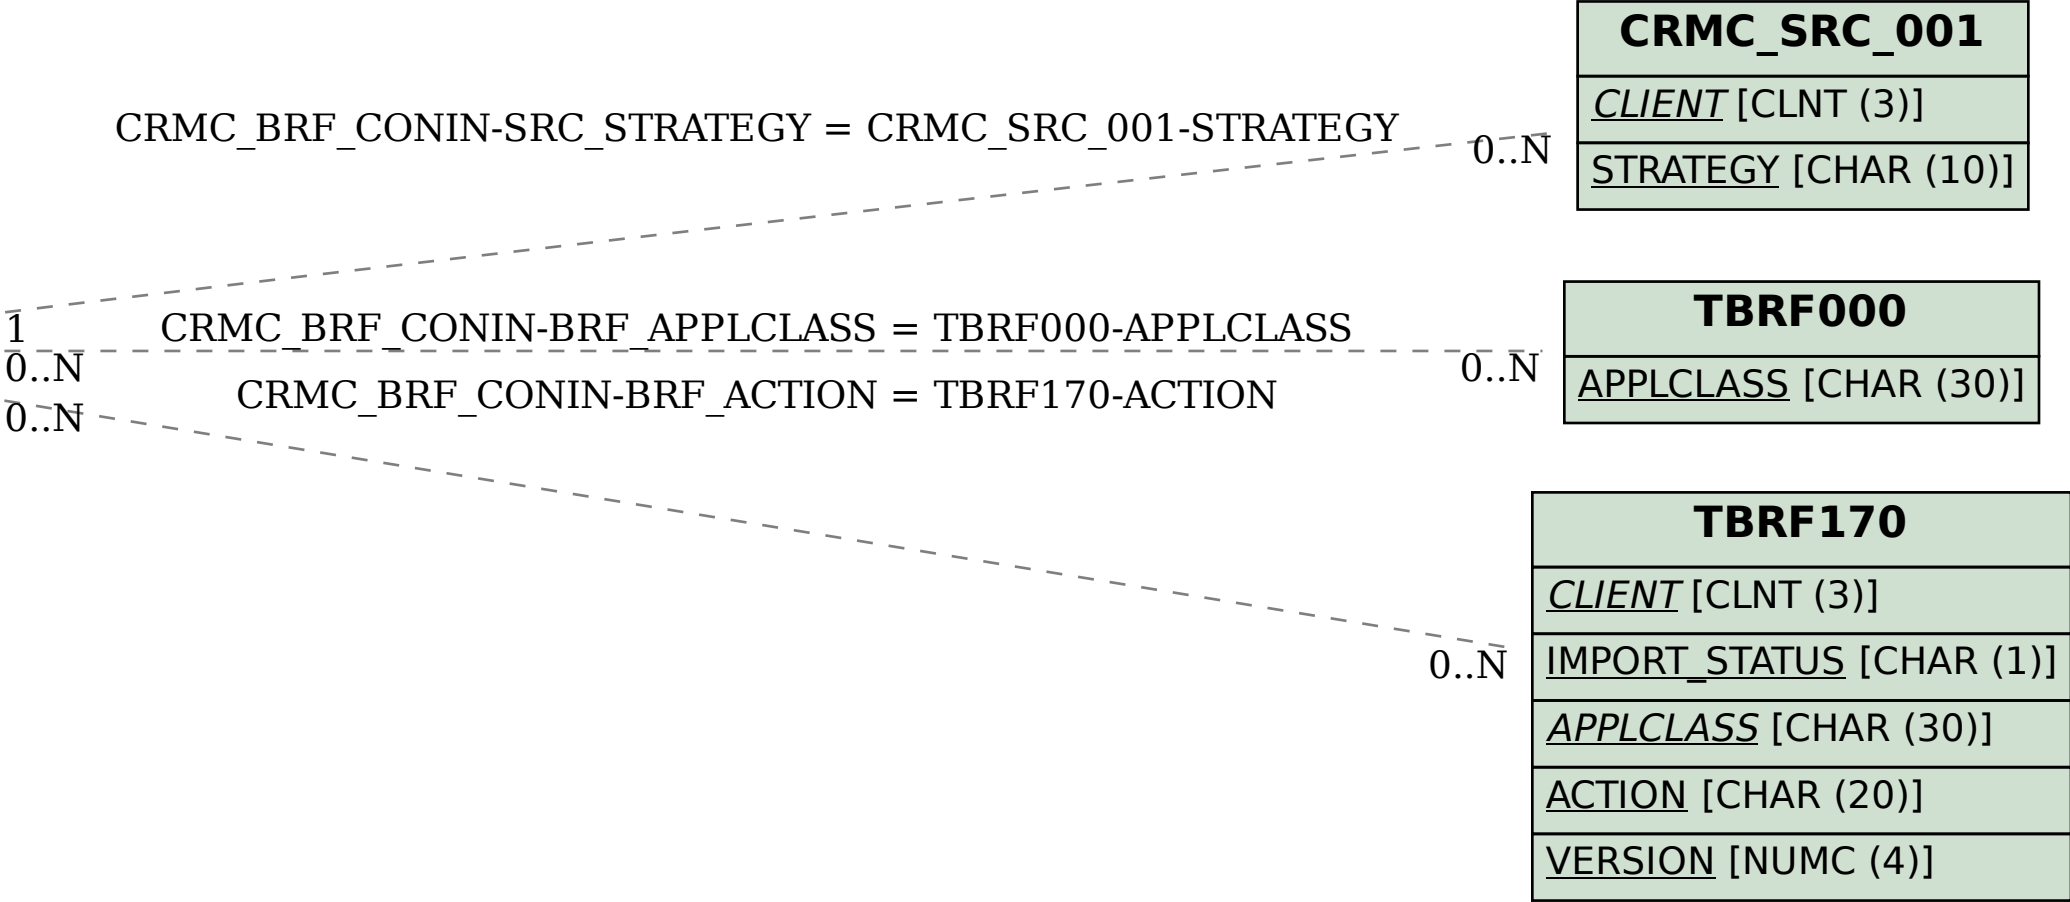

CRMC_SRC_001	
<u>CLIENT</u>	[CLNT (3)]
<u>STRATEGY</u>	[CHAR (10)]

TBRF000	
<u>APPLCLASS</u>	[CHAR (30)]

TBRF170	
<u>CLIENT</u>	[CLNT (3)]
<u>IMPORT_STATUS</u>	[CHAR (1)]
<u>APPLCLASS</u>	[CHAR (30)]
<u>ACTION</u>	[CHAR (20)]
<u>VERSION</u>	[NUMC (4)]