SAP ABAP table PAD506_QUE {General Structure for Additional Data in Query}

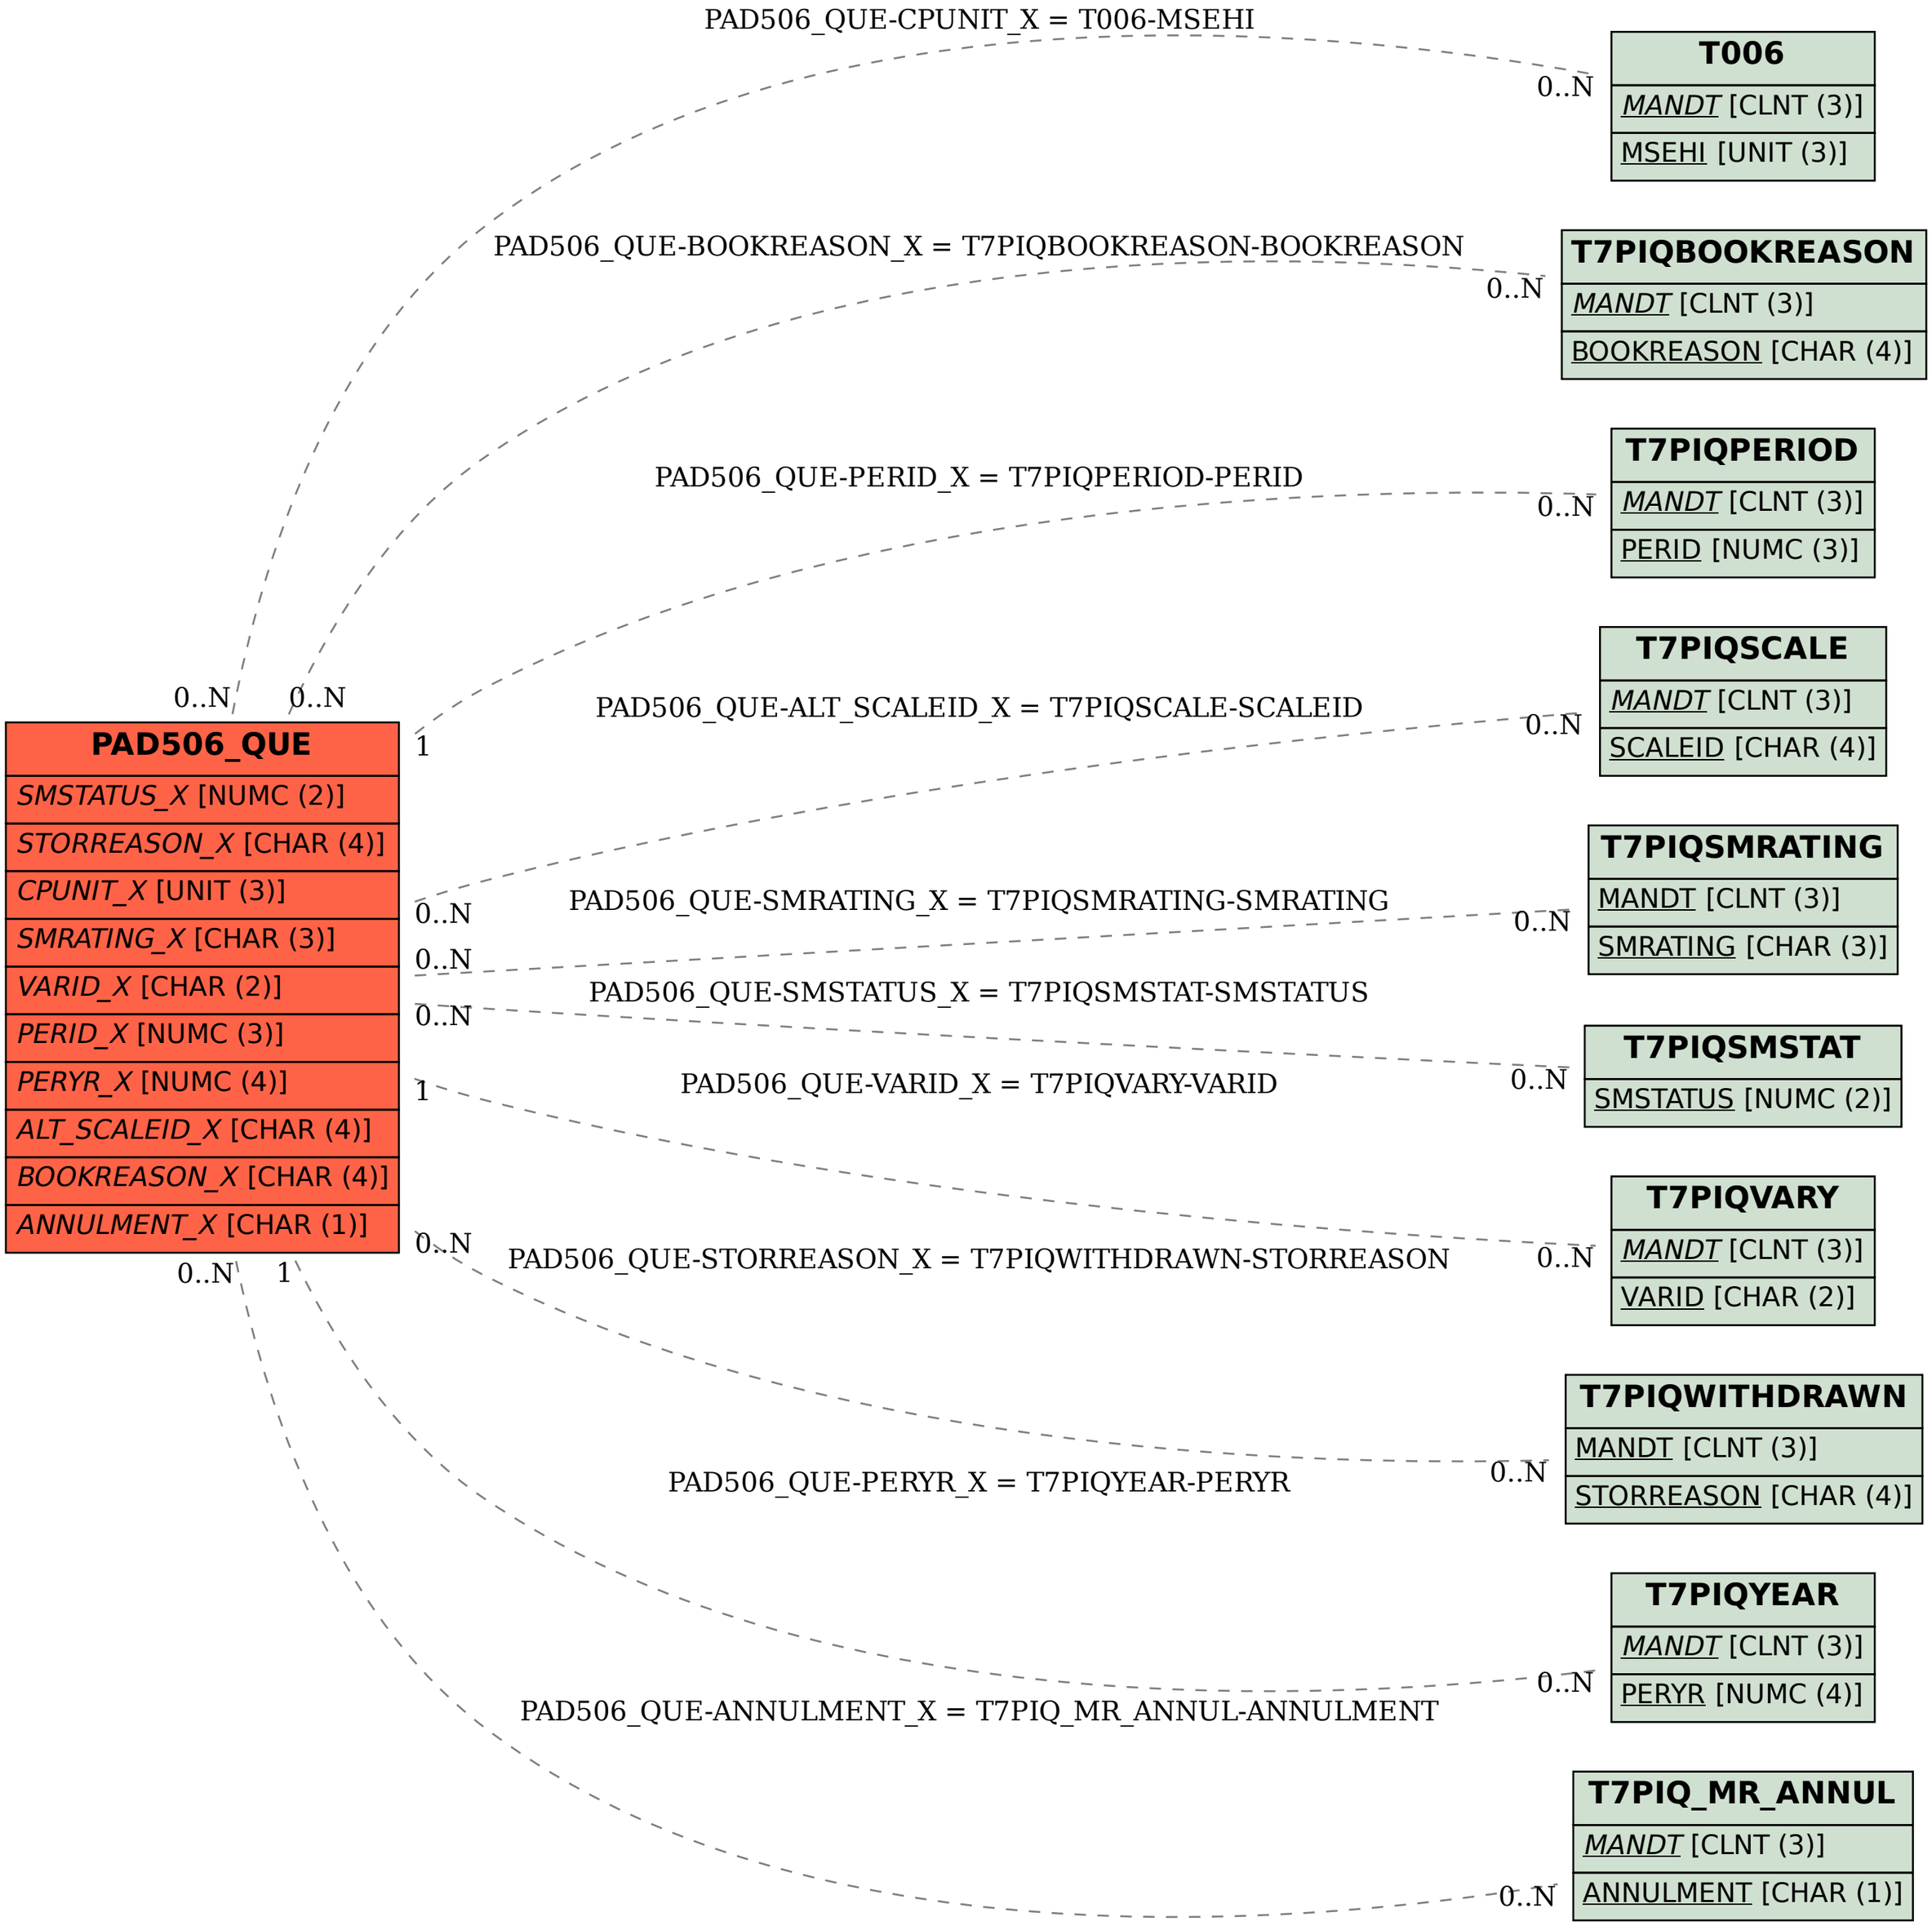
PAD506_QUE-CPUNIT_X = T006-MSEHI
T006
MANDT [CLNT (3)]
MSEHI [UNIT (3)]
PAD506_QUE-BOOKREASON_X = T7PIQBOOKREASON-BOOKREASON
T7PIQBOOKREASON
MANDT [CLNT (3)]
BOOKREASON [CHAR (4)]
PAD506_QUE-PERID_X = T7PIQPERIOD-PERID
T7PIQPERIOD
MANDT [CLNT (3)]
PERID [NUMC (3)]
PAD506_QUE-ALT_SCALEID_X = T7PIQSCALE-SCALEID
T7PIQSCALE
MANDT [CLNT (3)]
SCALEID [CHAR (4)]
PAD506_QUE-SMRATING_X = T7PIQSMRATING-SMRATING
T7PIQSMRATING
MANDT [CLNT (3)]
SMRATING [CHAR (3)]
PAD506_QUE-SMSTATUS_X = T7PIQSMSTAT-SMSTATUS
T7PIQSMSTAT
SMSTATUS [NUMC (2)]
PAD506_QUE-VARID_X = T7PIQVARY-VARID
T7PIQVARY
MANDT [CLNT (3)]
VARID [CHAR (2)]
PAD506_QUE-STORREASON_X = T7PIQWITHDRAWN-STORREASON
T7PIQWITHDRAWN
MANDT [CLNT (3)]
STORREASON [CHAR (4)]
PAD506_QUE-PERYR_X = T7PIQYEAR-PERYR
T7PIQYEAR
MANDT [CLNT (3)]
PERYR [NUMC (4)]
PAD506_QUE-ANNULMENT_X = T7PIQ_MR_ANNUL-ANNULMENT
T7PIQ_MR_ANNUL
MANDT [CLNT (3)]
ANNULMENT [CHAR (1)]
PAD506_QUE
SMSTATUS_X [NUMC (2)]
STORREASON_X [CHAR (4)]
CPUNIT_X [UNIT (3)]
SMRATING_X [CHAR (3)]
VARID_X [CHAR (2)]
PERID_X [NUMC (3)]
PERYR_X [NUMC (4)]
ALT_SCALEID_X [CHAR (4)]
BOOKREASON_X [CHAR (4)]
ANNULMENT_X [CHAR (1)]
0..N
0..N
1
0..N
0..N
0..N
1
0..N
0..N
0..N