SAP ABAP table RSFBPCMP {Open ODS View: Compounding}

RSFBPCMP-FBPNAME = RSFBP-FBPNAME

RSFBP

FBPNAME [CHAR (30)]

OBJVERS [CHAR (1)]

RSFBPCMP

FBPNAME [CHAR (30)]


OBJVERS [CHAR (1)]

SEMANTICS [CHAR (1)]

FIELDNAME [CHAR (12)]

POSIT [NUMC (4)]

CMPFIELD [CHAR (12)]

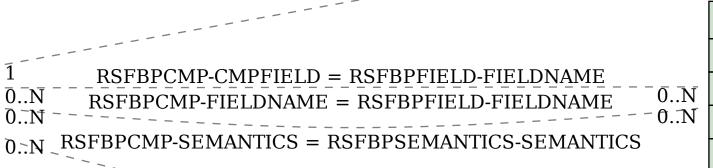

RSFBPFIELD

FBPNAME [CHAR (30)]

OBJVERS [CHAR (1)]

SEMANTICS [CHAR (1)]

FIELDNAME [CHAR (12)]

RSFBPSEMANTICS

FBPNAME [CHAR (30)]

OBIVERS [CHAR (1)]

 $0..\overline{N}$

SEMANTICS [CHAR (1)]