## SAP ABAP table SCPROXY {Appointments diary substitute}


```
SCPROXY

CLIENT [CLNT (3)]

PROXY [CHAR (12)]

OWNER [CHAR (12)]

DISTR_INDI [CHAR (1)]
```

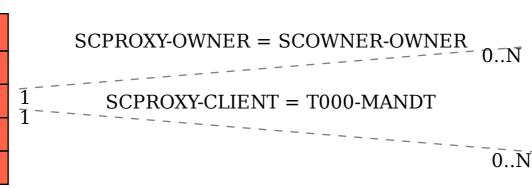

## **SCOWNER**

<u>CLIENT</u> [CLNT (3)]

OWNER [CHAR (12)]

T000

MANDT [CLNT (3)]