SAP ABAP table T7PIQ_GB_UFILEIN {UCAS: Records UFileIn}
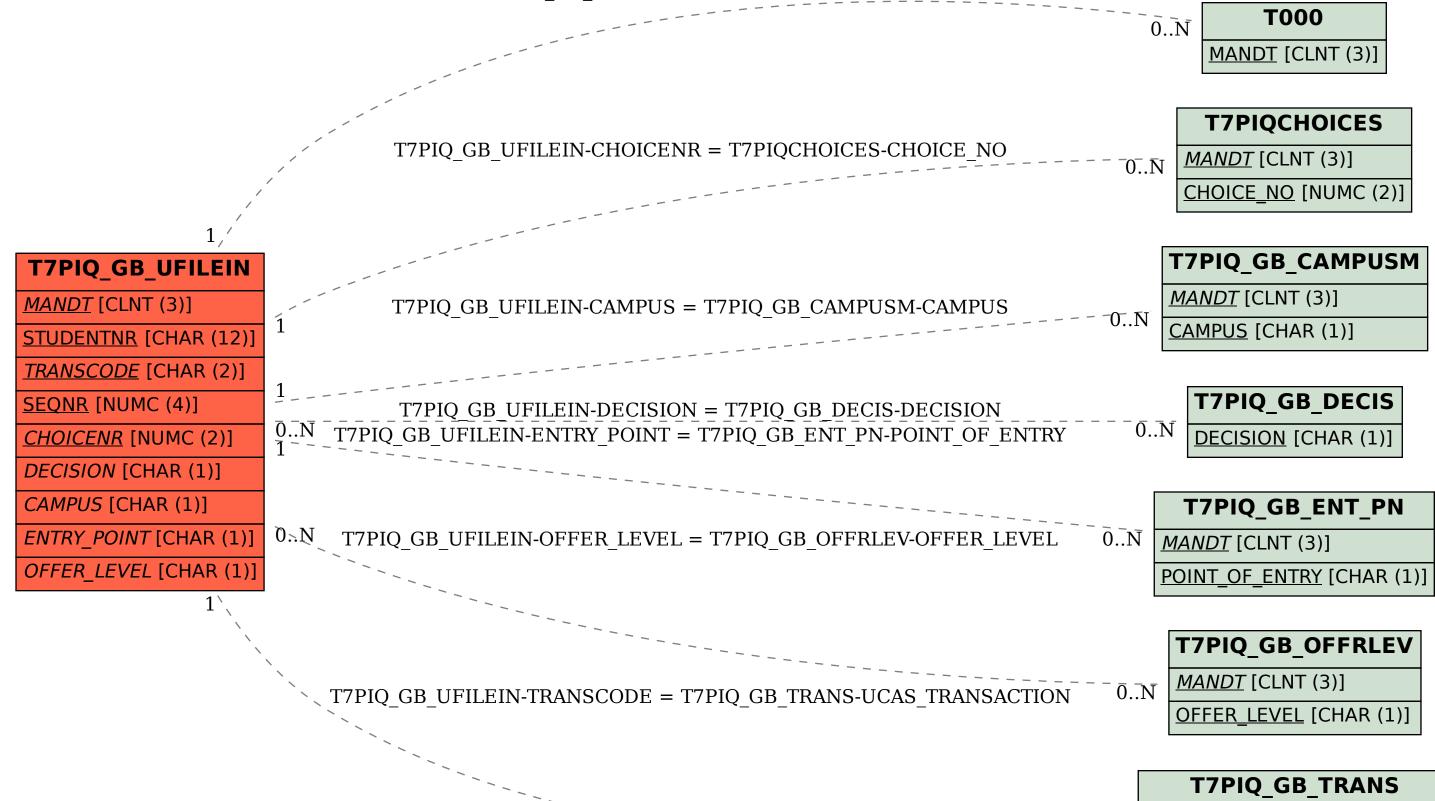
T7PIQ_GB_UFILEIN-MANDT = T000-MANDT

T000

<u>MANDT</u> [CLNT (3)]

0..N

T7PIQ_GB_UFILEIN-CHOICENR = T7PIQCHOICES-CHOICE_NO

T7PIQCHOICES

<u>MANDT</u> [CLNT (3)]

<u>CHOICE_NO</u> [NUMC (2)]

0..N

T7PIQ_GB_UFILEIN

<u>MANDT</u> [CLNT (3)]

<u>STUDENTNR</u> [CHAR (12)]

<u>TRANSCODE</u> [CHAR (2)]

<u>SEQNR</u> [NUMC (4)]

<u>CHOICENR</u> [NUMC (2)]

DECISION [CHAR (1)]

CAMPUS [CHAR (1)]

ENTRY_POINT [CHAR (1)]

OFFER_LEVEL [CHAR (1)]

1

1

1

0..N
1

0..N

1

T7PIQ_GB_CAMPUSM

<u>MANDT</u> [CLNT (3)]

<u>CAMPUS</u> [CHAR (1)]

0..N

T7PIQ_GB_UFILEIN-CAMPUS = T7PIQ_GB_CAMPUSM-CAMPUS

T7PIQ_GB_UFILEIN-DECISION = T7PIQ_GB_DECIS-DECISION

T7PIQ_GB_DECIS

<u>DECISION</u> [CHAR (1)]

0..N

T7PIQ_GB_UFILEIN-ENTRY_POINT = T7PIQ_GB_ENT_PN-POINT_OF_ENTRY

T7PIQ_GB_ENT_PN

<u>MANDT</u> [CLNT (3)]

<u>POINT_OF_ENTRY</u> [CHAR (1)]

0..N

T7PIQ_GB_UFILEIN-OFFER_LEVEL = T7PIQ_GB_OFFRLEV-OFFER_LEVEL

T7PIQ_GB_OFFRLEV

<u>MANDT</u> [CLNT (3)]

<u>OFFER_LEVEL</u> [CHAR (1)]

0..N

T7PIQ_GB_UFILEIN-TRANSCODE = T7PIQ_GB_TRANS-UCAS_TRANSACTION

T7PIQ_GB_TRANS

<u>UCAS_TRANSACTION</u> [CHAR (2)]

0..N